


AMERICANO-XR70

NO.70



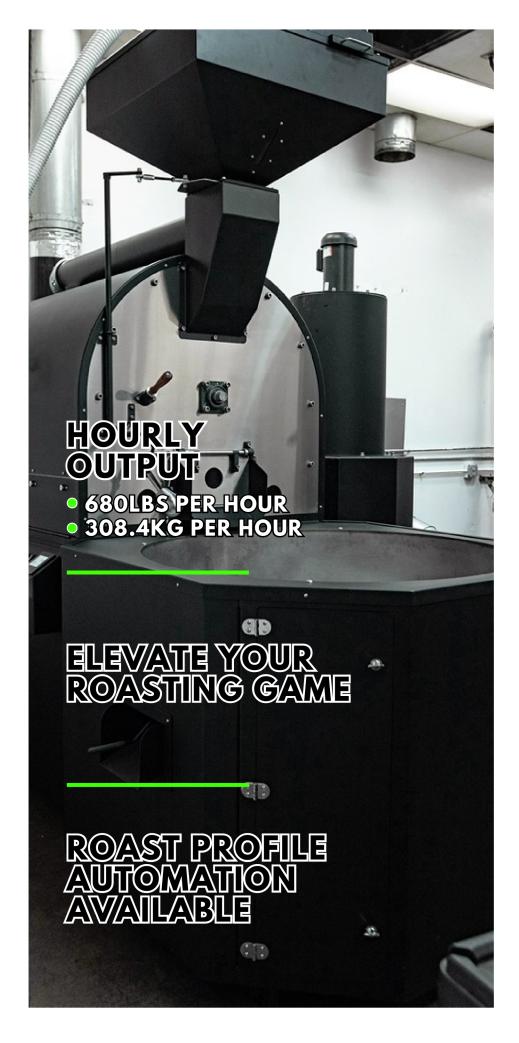

AMERICANO-XR70

680 LBS. PER HOUR

Roast Time: 12 - 16 Minutes One - Year Warranty



CONTACT



Phone

1.800.675.0160



Email

info@primoroasting.com



Address

1309 S. Lyon St. Santa Ana CA, 92705



CAPACITY

- (i) 60 170 lbs. Batch Sizes.
- 308.4 Kg Per Hour.



TECHNOLOGY

- Infrared Burner
- Roast Profile Software
- One-Year Warranty
- Adjustable Airflow
- Adjustable Drum Speed
- Independent Cyclone for Max Chaff Collection



ROASTER INFO

Introducing our the Americano-Xr70. The Sentinel has the production capacity to scale your roasting empire. The Xr70 is the perfect combination of consistency, speed, and reliability!



SPECIFICATIONS

Infrared Burner for Efficiency and a More Consistent Roast

Equipped with state-of-the-art temperature sensors and a powerful infrared heating system, the Americano-Xr70 ensures consistent heat distribution throughout the roasting process. Whether you prefer a light, medium, or dark roast, this roaster empowers you to achieve your desired roast profile with ease.

Oarbon Steel Construction

Built with durability and precision in mind, the Americano-Xr70 features high-quality carbon steel construction and a robust drum design that ensures optimal heat transfer and even roasting.

Roast and Cool Simultaneously

The integrated cooling system allows for simultaneous roasting and cooling. Increase production, productivity, and consistency with our built-in system.



STANDARD OPTIONS

Adjustable Airflow

Manual Gas Override

Adjustable Drum Speed

Propane or Natural Gas

USB - Profile Software



SALES INFORMATION

Christian

Primo Roasting / CMO 1.626.249.9663 Christian@PrimoRoasting.com

SENTINEL-XR20 INFORMATION	TECHNICAL DATA
Green Coffee Capacity, Min - Max	60 - 170 lbs. // 27.2 - 77.1 kg.
Dimensions, Maximum (Including Cyclone)	N/A
Shipping Weight	4000 lbs. // 1814.36 kg.
Roaster Weight	3000 lbs. // 1360.77 kg.
Cyclone Weight	500 lbs. // 226.79 kg.
Full Batch Roast Time	12 - 18 Minutes
Hourly Output	680 lbs. // 308.4 kg.
Roast Air, Maximum	1413 SCFM (MAX)
Cooling Tray, Air Maximum	2826 SCFM (MAX)
Roaster/Cyclone Exhaust Diameter	8" // 203.2 mm
Temperature High Limit	500F. // 260C.
Gas Information	
Gas Types	Liquid Propane (LP) or Natural Gas (NG)
Maximum Consumption	450,000 BTU/hr
Typical Consumption Per Roast	288,000 BTU/hr
Inlet Gas Supply Connection	3/4" in. Male NPT
Electrical Information	
Volts AC	220V Three Phase
Frequencies	60Hz.





